




# GE

GENERATOARE DE AER CALD, CU ARDERE DIRECTA

---

## GE - GENERATOARE DE AER CALD, CU ARDERE DIRECTA


- Arzător automat pe motorină
- Control electronic flacără
- Termostat supraîncălzire
- Priză conectare la termostat, umidostat sau temporizator (GE 36, GE 46, GE 65, GE 105)
- Cablu alimentare electrică cu ștecar (1,5m)
- Cameră de combustie din inox AISI 430
- Sistem post-ventilare temporizat pentru răcirea camerei de combustie
- Furtunuri de alimentare motorină din cauciuc rezistent la hidrocarburi acoperit cu material textil (GE 20, GE 36, GE 46) sau cu carcasă metalică (GE 65, GE 105)
- Rezervor din polietilenă anti-șoc (GE 36, GE 46), din oțel (GE 20, GE 65, GE 105)
- Bușon închidere rezervor tip baionetă
- Bușon pentru drenaj
- Automatic built-in oil burner
- Electronic flame-control
- Safety thermostat
- Set to be connected to a thermostat or a humidostat or a timer (GE 36, GE 46, GE 65, GE 105)
- Power cord (1,5 m) with plug
- AISI 430 stainless steel combustion chamber
- Automatic post ventilation of unit
- Fuel feed lines in hydrocarbon resistant rubber, whit a reinforced textile (GE 20, GE 36, GE 46) or metal sheath (GE 65, GE 105)
- Tank in tough hydrocarbon resistant polythene (GE 20, GE 36, GE 46) or steel (GE 65, GE 105)
- Bayonet-type fuel tank cap
- Fuel tank drain plug

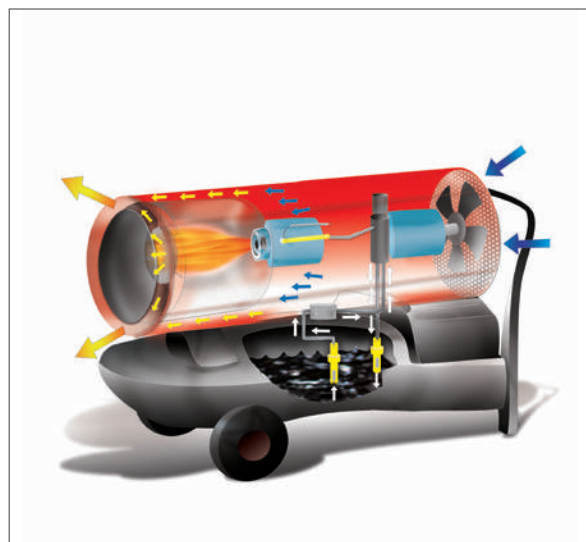

ACCESORII LA CERERE

INDICATOR DE NIVEL	FILTRU IN REZERVOR	INELE DE RIDICARE (4 BUC.)
		
<p>Mod. GE 36 - GE 46 - GE 65 - GE 105 Cod. 02AC508</p>	<p>Mod. GE 36 - GE 46 - GE 65 - GE 105 Cod. 02AC556</p>	<p>Mod. GE 65 - GE 105 Cod. 02AC511</p>
KIT ROTI PNEUMATICE Ø 250mm	TERMOSTAT AMBIENTAL +5/+30°C CABLU L=10 m SI STECAR LA 90°	TERMOSTAT AGRICULTURA/SANTIERE -5/+50°C CABLU L=10m SI STECAR LA 90°
		
<p>Mod. GE 65 Cod. 02AC598</p>	<p>Cod. 02AC581</p>	<p>Cod. 02AC582</p>
<p>Mod. GE 105 Cod. 02AC599</p>		
CARUCIORCU MANER SI ROTI	FILTRU PREINCALZIRE MOTORINA	KIT MONOTUB CONECTARE REZERVOR EXTERN CU AERISIRE
		
<p>Mod. GE 20 Cod. 02AC596</p>	<p>Mod. GE 65 - GE 105 Cod. 02AC548</p>	<p>Mod. GE 65 - GE 105 Cod. 02AC632</p>


## GE - GENERATOARE DE AER CALD, CU ARDERE DIRECTA

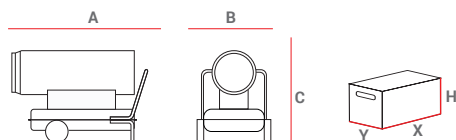

GREUTATI SI DIMENSIUNI UTILAJ					AMBALAJ			
MOD	A	B	C	Net	X	Y	H	Brut
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
GE 20	720	300	450	20	760	320	425	23
GE 36	1.075	440	615	25	1.050	400	520	29
GE 46	1.075	440	630	38	1.050	400	580	45
GE 65	1.200	555	860	58	1.200	480	900	78
GE 105	1.492	670	1.005	86	1.690	620	1.050	111


		GE 20	GE 36	GE 46	GE 65	GE 105
cod		02GE121	02GE102	02GE103	02GE104	02GE105
putere termica nominala	Hs [kW]	21,4	38,4	49	69,3	111,1
	Hs [kcal/h - BTU/h]	18.369 - 73.110	33.043 - 131.512	42.173 - 167.850	59.565 - 237.067	95.507 - 380.331
randament	[%]	100	100	100	100	100
debit de aer	[m <sup>3</sup> /h]	350	605	1400	2500	4600
temperatura aer	a 20°C [°C]	170	177	97	120	68
consum	[kg/h]	1,69	3,04	3,88	5,48	8,85
capacitate rezervor	[l]	17	42	42	65	105
putere electrica absorbita 230 V	[W]	200	232	400	598	1170
alimentare electrica [V - ph - Hz]		230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
cantitate pe palet	[buc.]	20	12	9	1	1

## Panoul electric

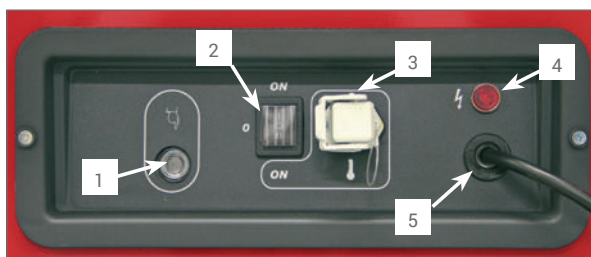

### Legenda

- 1 Buton repornire cu led blocare (roșu), funcționare (verde) și stand-by(portocaliu)
- 2 Întrerupător comandă cu 3 poziții:
  - poziția 0 pentru oprire
  - poziția 1 pentru funcționare continuă
  - poziția 2 pentru funcționare cu termostat ambient, umidostat, temporizator
- 3 Priză pentru termostat ambient, umidostat, temporizator
- 4 Led tensiune
- 5 Ieșire cablu de linie
- 6 Capac pentru (GE-GE/S 65,GE-GE/S 105, EC-EC/S 55, EC-EC/S 85)
- 7 Suport cablu electric

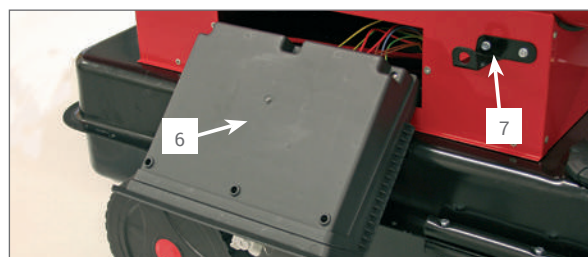

### Legend

- 1 Reset button with block (red), working (green) and stand-by (orange) indicator light
- 2 Three way control switch:
  - position 0 for stop
  - position 1 for "continuous" on
  - position 2 for on with ambient thermostat, humidostat, timer
- 3 Socket for ambient thermostat, humidostat, timer
- 4 Voltage warning light (connected to the mains)
- 5 Power cord outlet
- 6 Plastic cover (GE-GE/S 65,GE-GE/S 105, EC-EC/S 55, EC-EC/S 85)
- 7 Power cord bracket